


iQ700, Island cooker hood, 90 cm, Stainless steel LF91BUV50B

 **BUY NOW**



A+

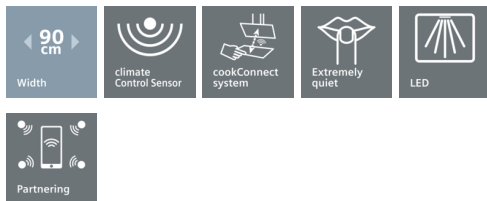

The island hood features a very high extraction rate in a distinguished design that coordinates with a range of Siemens appliances, as well as your kitchen.

- ✓ The quiet high-performance motor: ensures efficient odour and steam removal.
- ✓ cookConnect system and climate control sensor: Perfect cooperation
- ✓ Home Connect: Access and control your hood, no matter where you are
- ✓ LED lights: For optimal visibility and ambience when cooking.
- ✓ Intensive setting starts automatically when you need it – Intensive setting with automatic revert.
- ✓ touchControl: quickly and easily manage the power levels and the LED light
- ✓ For peak performance - Intensive setting with automatic revert

Features

Technical Data

Typology : Chimney
 Approval certificates : CE, VDE
 Length of electrical supply cord (cm) : 130
 Height of the chimney (mm) : 698-878/698-998
 Height of product, without chimney (mm) : 46
 Minimum distance above an electric hob : 550
 Minimum distance above a gas hob : 650
 Net weight (kg) : 31.554
 Type of control : Electronic
 Number of speed settings : 3-stage + 2 intensive
 Maximum output air extraction (m³/h) : 598
 Boost position output recirculating (m³/h) : 427.0
 Boost position air extraction (m³/h) : 980
 Number of lights (Stck) : 4
 Noise level (dB(A) re 1 pW) : 62
 Diameter of air outlet (mm) : 120 / 150
 Grease filter material : Washable stainless steel
 EAN code : 4242003832073
 Connection rating (W) : 266
 Current (A) : 10
 Voltage (V) : 220-240
 Frequency (Hz) : 50; 60
 Plug type : GB plug
 Installation type : Island

Optional accessories

LZ53850	Standard recirculation kit
LZ53451	Standard odor filter (replacement)
LZ31XXB16	Clean Air Plus odor filter (replacement)
LZ22CXC56	Clean Air Plus recirc. kit external
LZ12530	Extension for mounting kit 1000 mm
LZ12510	Extension for mounting kit 500 mm
LZ12410	Adapter for roof inclination front/back
LZ12385	Chimney extension 1600 mm
LZ12310	Adapter for roof inclination left/right
LZ12285	Chimney extension 1100 mm
LZ00XXP00	Long Life odor filter (replacement)



4 242003 832073

iQ700, Island cooker hood, 90 cm, Stainless steel LF91BUV50B

Features

Key performance features:

- Energy Efficiency Class: A+ (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591 ø 15 cm: max. Normal use 597 m³/h Intensive 980 m³/h
- Noise max. Normal Level: Noise, max. speed in normal us: 62 dB dB*

Home Connect: Remote Monitoring and Control

- Home Connect: Remote Monitoring and Control for connected home appliances and operation via smartphone or tablet (only in countries where Home Connect service is available)
- The Home Connect functionality can be extended by integrating numerous applications from external cooperation partners (partnerships)
- Voice Control enabled via popular voice assistants (only in countries where this service is available)
- Interval function: available via Home Connect
- Silence function: available via Home Connect

Features

- touchControl with 7-segment display
- 3 power levels and 2 intensive settings
- Automatic intensive revert (6mins)
- cookConnect hob based hood control
- climateControl sensor
- Fully automatic hood
- softLight with dimmer function
- 4 x 1.5W LED
- Additional noise reduction insulation
- Efficient BLDC motor
- Twin channel high performance fan motor
- Automatic after running (Automatic after running (10 minutes))
- Grease and charcoal filter saturation indicators
- 3 x metal grease filter cassettes - dishwasher safe
- Steel filter cover

Design

- Stainless Steel
- For ceiling mounted installation
- Electronic control

Performance/technical information

- Suitable for ducted and re-circulating operation
- For recirculated extraction a recirculating kit or a CleanAir recirculation kit (accessory) is needed
- Max. extraction rate: 980 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air: Max. normal use: 62 dB(A) re 1 pW Intensive: 73 dB(A) re 1 pW
- Extraction rate in recirculation mode: Max. normal use: 359 m³/h Intensive: 427 m³/h
- Noise levels in recirculation mode: Max. normal use: 72 dB(A) re 1 pW Intensive: 76 dB(A) re 1 pW
- With the Clean Air Plus recirculation kit (available as optional accessory) your appliances reaches: Extraction rate in recirculation mode: Max. normal use: 462 m³/h Intensive: 561 m³/h Noise level in recirculation mode: Max. normal use: 68 dB(A) re 1 pW Intensive: 72 dB(A) re 1 pW
- Power rating: 266 W

- Light Intensity: 411 lux
- Colour Temperature: 3500 K
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 744-924 x 898 x 600 mm
- Dimensions recirculating, chimney (HxWxD): 744-1044 x 898 x 600 mm
- Blower Efficiency Class: A*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: B*
- Average Energy Consumption: 36.8 kWh/year*

Optional accessories

- Recirculating kit LZ00XP00

* In accordance with the EU-Regulation No 65/2014